

KT

Grommets, large





1.1

IP54

IP66

IP68

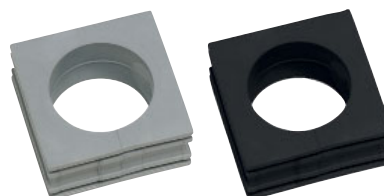

KT / KT-DPF large

Product Description

Cable grommets KT large accept a wide range of cable diameters from 16 to 35 mm. They are used with the cable entry frames & cord grips of product groups 1.11 & 1.12.



ATG adapter grommets provide the possibility to hold a small KT grommet to reduce the clamping range down to 1 mm.

Specifications KT gray

Material	Elastomer
Flame class	UL94-Vo
IP rating	KT round, single: up to IP66/IP68 ATG/BTG: IP54
UL type rating	up to UL type 4X (acc. to UL 50E)
Operating temperature	- 40°C to + 100°C (static) - 40°F to + 212°F (static)
Properties	Halogen-free, silicone-free

Specifications KT black

Material	Elastomer
Flame class	UL94-HB
IP rating	KT round, single: up to IP66/IP68 ATG/BTG: IP54
Operating temperature	- 30°C to + 90°C (static) - 22°F to + 194°F (static)
Properties	Higher chemical resistance

Description	Type	Order No. gray	Order No. black	Clamping range	PU
 ATG	ATG	41253	41353	Adapter grommet	10
 BTG	BTG	41252	41352	Blank grommet	10
 KT round	KT 16	41216	41316	16 - 17 mm / 0.63 - 0.669 "	10
	KT 17	41217	41317	17 - 18 mm / 0.669 - 0.709 "	10
	KT 18	41218	41318	18 - 19 mm / 0.709 - 0.748 "	10
	KT 19	41219	41319	19 - 20 mm / 0.748 - 0.787 "	10
	KT 20	41220	41320	20 - 21 mm / 0.787 - 0.827 "	10
	KT 21	41221	41321	21 - 22 mm / 0.827 - 0.866 "	10
	KT 22	41222	41322	22 - 23 mm / 0.866 - 0.906 "	10
	KT 23	41223	41323	23 - 24 mm / 0.906 - 0.945 "	10
	KT 24	41224	41324	24 - 25 mm / 0.945 - 0.984 "	10
	KT 25	41225	41325	25 - 26 mm / 0.984 - 1.024 "	10
	KT 26	41226	41326	26 - 27 mm / 1.024 - 1.063 "	10
	KT 27	41227	41327	27 - 28 mm / 1.063 - 1.102 "	10
	KT 28	41228	41328	28 - 29 mm / 1.102 - 1.142 "	10
	KT 29	41229	41329	29 - 30 mm / 1.142 - 1.181 "	10
	KT 30	41230	41330	30 - 31 mm / 1.181 - 1.22 "	10
	KT 31	41231	41331	31 - 32 mm / 1.22 - 1.26 "	10
	KT 32	41232	41332	32 - 33 mm / 1.26 - 1.299 "	10
	KT 33	41233	41333	33 - 34 mm / 1.299 - 1.339 "	10
	KT 34	41234	41334	34 - 35 mm / 1.339 - 1.378 "	10

*Only valid for gray product types