SIEMENS

Data sheet 3RV2121-4CA10

Circuit breaker size S0 for motor protection, CLASS 10 with overload relay function A-release 16...22 A N-release 286 A screw terminal Standard switching capacity



Product brand name	SIRIUS
Product designation	Circuit breaker
Design of the product	For motor protection with overload relay function
Product type designation	3RV2

General technical data	
Size of the circuit-breaker	S0
Size of contactor can be combined company-specific	S00, S0
Product extension	
Auxiliary switch	Yes
Power loss [W] for rated value of the current	
 at AC in hot operating state 	10.5 W
• at AC in hot operating state per pole	3.5 W
Insulation voltage with degree of pollution 3 rated	690 V
value	
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• in networks with grounded star point between	400 V
main and auxiliary circuit	

 in networks with grounded star point between main and auxiliary circuit 	400 V
Protection class IP	
• on the front	IP20
of the terminal	IP20
Shock resistance	
• acc. to IEC 60068-2-27	25g / 11 ms
Mechanical service life (switching cycles)	
 of the main contacts typical 	100 000
 of auxiliary contacts typical 	100 000
Electrical endurance (switching cycles)	
• typical	100 000
Reference code acc. to DIN EN 81346-2	Q
Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
during operation	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
Temperature compensation	-20 +60 °C
Relative humidity during operation	10 95 %
Main circuit	
Main circuit Number of poles for main current circuit	3
Main circuit Number of poles for main current circuit Adjustable pick-up value current of the current-	
Main circuit Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release	3
Main circuit Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage	3 16 22 A
Main circuit Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value	3 16 22 A 690 V
Main circuit Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum	3 16 22 A 690 V 690 V
Main circuit Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value	3 16 22 A 690 V 690 V 50 60 Hz
Main circuit Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value	3 16 22 A 690 V 690 V
Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current	3 16 22 A 690 V 690 V 50 60 Hz
Main circuit Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value	3 16 22 A 690 V 690 V 50 60 Hz
Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value	3 16 22 A 690 V 690 V 50 60 Hz 22 A
Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3	3 16 22 A 690 V 690 V 50 60 Hz 22 A
Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power	3 16 22 A 690 V 690 V 50 60 Hz 22 A
Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power • at AC-3	3 16 22 A 690 V 690 V 50 60 Hz 22 A
Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power • at AC-3 — at 230 V rated value	3 16 22 A 690 V 690 V 50 60 Hz 22 A
Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value	3 16 22 A 690 V 690 V 50 60 Hz 22 A 22 A 5 500 W 11 000 W 11 000 W
Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value	3 16 22 A 690 V 690 V 50 60 Hz 22 A 22 A 5 500 W 11 000 W
Number of poles for main current circuit Adjustable pick-up value current of the current-dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power • at AC-3 — at 230 V rated value — at 400 V rated value — at 500 V rated value	3 16 22 A 690 V 690 V 50 60 Hz 22 A 22 A 5 500 W 11 000 W 11 000 W

Auxiliary circuit	
Design of the auxiliary switch	laterally
Number of NC contacts for auxiliary contacts	0
Number of NO contacts for auxiliary contacts	0
Number of CO contacts	
• for auxiliary contacts	0
Operating current of auxiliary contacts at AC-15	
● at 24 V	1.5 A
• at 230 V	1.5 A
Operating current of auxiliary contacts at DC-13	
• at 24 V	1 A
Protective and monitoring functions	
Product function	
Ground fault detection	No
Phase failure detection	Yes
Trip class	CLASS 10
Design of the overload release	thermal
Operational short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
• at 400 V rated value	25 kA
• at 500 V rated value	5 kA
• at 690 V rated value	2 kA
Maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	55 kA
• at AC at 500 V rated value	10 kA
• at AC at 690 V rated value	4 kA
Response value current	
• of instantaneous short-circuit trip unit	286 A
UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
● at 480 V rated value	22 A
• at 600 V rated value	22 A
Yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	1.5 hp
— at 230 V rated value	3 hp
• for three-phase AC motor	
— at 200/208 V rated value	7.5 hp
— at 220/230 V rated value	7.5 hp

— at 460/480 V rated value	15 hp
Contact rating of auxiliary contacts according to UL	C600 / R300

Yes
magnetic
fuse gL/gG: 6 A, quick: 10 A
gL/gG 63 A
gL/gG 50 A
gL/gG 50 A

Mounting type screw and snap-on mounting onto 35 mm standard mount according to DIN EN 60715 Height 97 mm Width 65 mm Depth 97 mm Required spacing with side-by-side mounting forwards Backwards upwards downwards at the side for grounded parts forwards 0 mm • for grounded parts 0 mm - Backwards 0 mm - at the side 0 mm - at the side 0 mm - at the side 30 mm	
Height 97 mm Width 65 mm Depth 97 mm Required spacing • with side-by-side mounting — forwards 0 mm — Backwards 0 mm — upwards 50 mm — downwards 50 mm — at the side 0 mm • for grounded parts — forwards 0 mm • for wards 0 mm • for grounded parts — towards 0 mm • for many of the side 0 mm • f	
Height 97 mm Width 65 mm Depth 97 mm Required spacing • with side-by-side mounting — forwards 0 mm — Backwards 0 mm — upwards 50 mm — downwards 50 mm — at the side 0 mm • for grounded parts — forwards 0 mm — a the side 0 mm • for grounded parts — powards 0 mm — upwards 50 mm — a the side 0 mm	nting rail
Width 65 mm Depth 97 mm Required spacing • with side-by-side mounting — forwards 0 mm — Backwards 0 mm — upwards 50 mm — downwards 50 mm — at the side 0 mm • for grounded parts — forwards 0 mm — backwards 0 mm — upwards 50 mm — at the side 0 mm	
Depth 97 mm Required spacing	
Required spacing • with side-by-side mounting — forwards — Backwards — upwards — downwards — at the side • for grounded parts — forwards — Backwards — upwards • for grounded parts — forwards — upwards 50 mm 0 mm • for grounded parts — forwards — upwards 50 mm	
 with side-by-side mounting forwards Backwards upwards downwards at the side for grounded parts forwards Backwards mm mm o mm mm mupwards mm <l< td=""><td></td></l<>	
— forwards 0 mm — Backwards 0 mm — upwards 50 mm — downwards 50 mm — at the side 0 mm • for grounded parts 0 mm — Forwards 0 mm — Backwards 0 mm — upwards 50 mm	
— Backwards 0 mm — upwards 50 mm — downwards 50 mm — at the side 0 mm • for grounded parts 0 mm — forwards 0 mm — Backwards 0 mm — upwards 50 mm	
— upwards 50 mm — downwards 50 mm — at the side 0 mm ● for grounded parts 0 mm — forwards 0 mm — Backwards 0 mm — upwards 50 mm	
 — downwards — at the side • for grounded parts — forwards — Backwards — upwards 50 mm 0 mm 50 mm 	
 — at the side ● for grounded parts — forwards — Backwards — upwards 50 mm 	
 for grounded parts forwards Backwards upwards 50 mm 	
— forwards 0 mm — Backwards 0 mm — upwards 50 mm	
— Backwards 0 mm — upwards 50 mm	
— upwards 50 mm	
— at the side 30 mm	
— downwards 50 mm	
• for live parts	
— forwards 0 mm	
— Backwards 0 mm	
— upwards 50 mm	
— downwards 50 mm	
— at the side 30 mm	

Connections/ Terminals	
Product function	

removable terminal for auxiliary and control	No
circuit	
Type of electrical connection	corow type terminals
• for main current circuit	screw-type terminals
for auxiliary and control current circuit	screw-type terminals
Arrangement of electrical connectors for main current circuit	Top and bottom
Type of connectable conductor cross-sections	
• for main contacts	
 single or multi-stranded 	2x (1 2,5 mm²), 2x (2,5 10 mm²)
 finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
 at AWG conductors for main contacts 	2x (16 12), 2x (14 8)
Type of connectable conductor cross-sections	
• for auxiliary contacts	
 single or multi-stranded 	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 at AWG conductors for auxiliary contacts 	2x (20 16), 2x (18 14)
Tightening torque	
 for main contacts with screw-type terminals 	2 2.5 N·m
 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m
Design of screwdriver shaft	Diameter 5 to 6 mm
Size of the screwdriver tip	Pozidriv 2
Design of the thread of the connection screw	
• for main contacts	M4
 of the auxiliary and control contacts 	M3
Safety related data	
B10 value	
 with high demand rate acc. to SN 31920 	5 000
Proportion of dangerous failures	
 with low demand rate acc. to SN 31920 	50 %
 with high demand rate acc. to SN 31920 	50 %
Failure rate [FIT]	
• with low demand rate acc. to SN 31920	50 FIT
T1 value for proof test interval or service life acc. to IEC 61508	10 y
Display version	
• for switching status	Handle
Certificates/ approvals	

General Product Approval

Declaration of Conformity







KC





Declaration	of
Conformity	

Test Certificates

Marine / Shipping

Miscellaneous

Type Test Certificates/Test Report

Special Test Certificate







Marine / Shipping

other











VDE

Railway

Vibration and Shock

Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2121-4CA10

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2121-4CA10

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2121-4CA10


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2121-4CA10&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2121-4CA10/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2121-4CA10&objecttype=14&gridview=view1

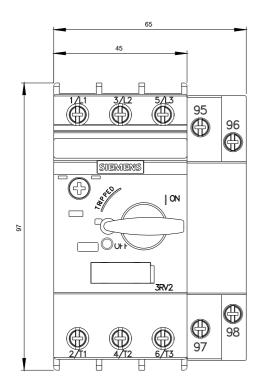

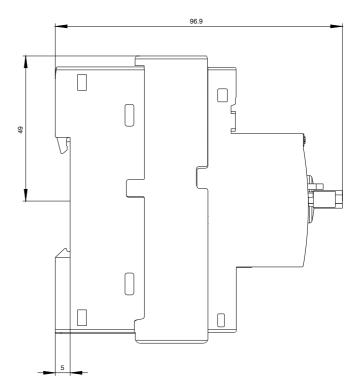

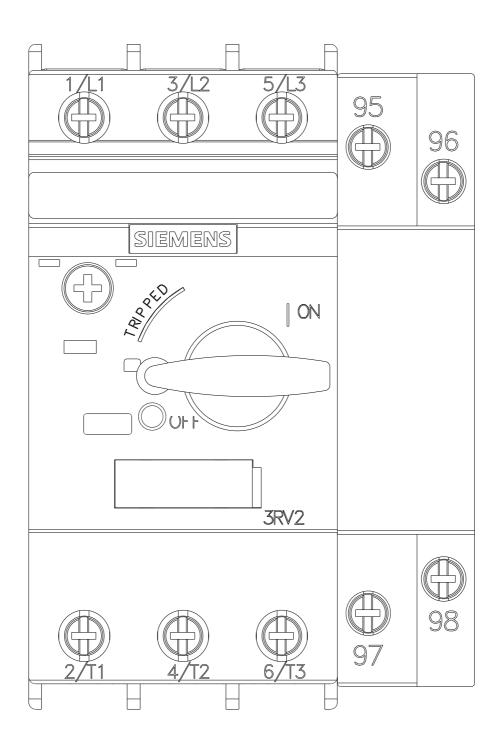

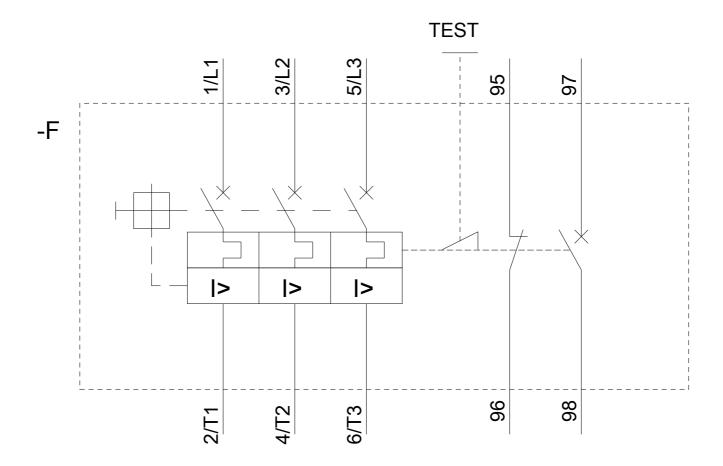

last modified: 10/16/2019