



Gufugleypir LI 64MB521 iQ100

Útdraganlegur.

Byggist í 60 sm efri skáp.

Orkuflokkur B.

Fyrir útblástur eða umloftun.

Þrjár styrkstillingar.

Afköst (DIN/EN 61591): Mest 389 m³/klst.

Hljóð: Mest 67 dB.

Dimmanleg LED-lýsing.

Málmitusíur, má þvo í uppþvottavél.

Aukahlutir:


Startsett með kolasíu LZ45450.

Tækjamál (h x b x d):


20,3 x 60 x 29 sm.

Innbyggingarmál (h x b x d):


16,2 x 52,6 x 29 sm.




Smíðamál LI 64MB521

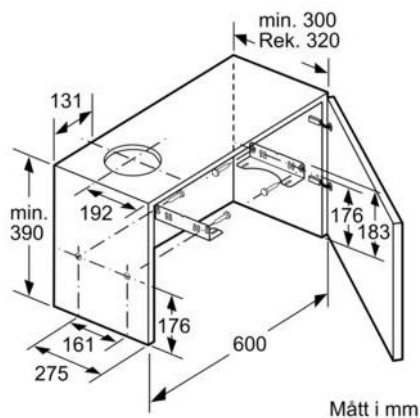

Mått i mm

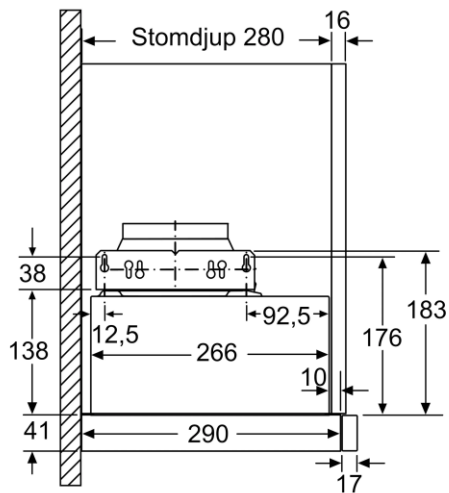


Mått i mm

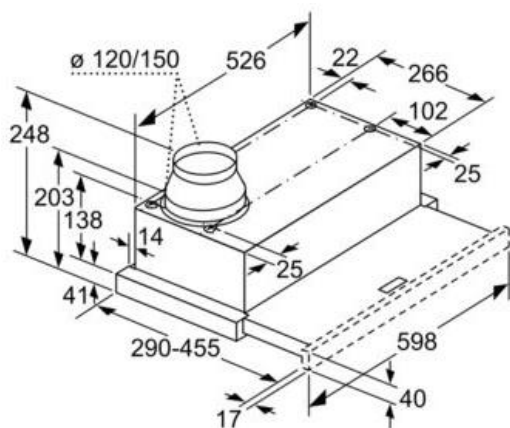


Det går att djupanpassa
fläktutdraget upp till 29 mm

Mått i mm

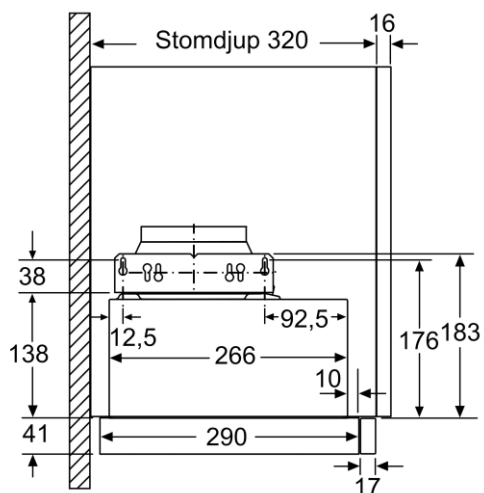

Mått i mm

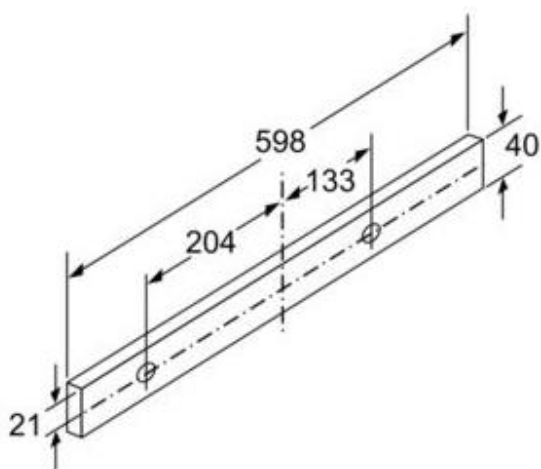

Mått i mm

Smith & Norland ■ Nóatúni 4 ■ 105 Reykjavík ■ Sími 520 3000

www.sminor.is