

SIRIUS Compact load feeder DOL starter 690 V 24 V AC/DC 50...60 Hz 0.32...1.25 A IP20 Connection main circuit: Spring-type terminal Connection auxiliary circuit: Spring-type terminal



Product brand name	SIRIUS
Product designation	compact starter
Design of the product	direct starter
Product type designation	3RA61

General technical data	
Product function	
• Control circuit interface to parallel wiring	Yes
Product extension	
• Auxiliary switch	Yes
Power loss [W] for rated value of the current	
• at AC in hot operating state	0.1 W
• at AC in hot operating state per pole	0.03 W
Power loss [W] for rated value of the current without load current share typical	2.9 W
Insulation voltage	
• rated value	690 V
Degree of pollution	3
Surge voltage resistance rated value	6 000 V
maximum permissible voltage for safe isolation	

<ul style="list-style-type: none"> <li>• between main and auxiliary circuit</li> <li>• between auxiliary and auxiliary circuit</li> <li>• between control and auxiliary circuit</li> </ul>	400 V 250 V 300 V
<b>Protection class IP</b>	IP20
<b>Shock resistance</b>	a=60 m/s <sup>2</sup> (6g) with 10 ms per 3 shocks in all axes
<b>Vibration resistance</b>	f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s <sup>2</sup> ; 10 cycles
<b>Mechanical service life (switching cycles)</b> <ul style="list-style-type: none"> <li>• of the main contacts typical</li> <li>• of auxiliary contacts typical</li> <li>• of the signaling contacts typical</li> </ul>	10 000 000 10 000 000 10 000 000
<b>Electrical endurance (switching cycles) of auxiliary contacts</b> <ul style="list-style-type: none"> <li>• at DC-13 at 6 A at 24 V typical</li> <li>• at AC-15 at 6 A at 230 V typical</li> </ul>	30 000 200 000
<b>Type of assignment</b>	continous operation according to IEC 60947-6-2
<b>Reference code acc. to DIN EN 81346-2</b>	Q
<b>Reference code acc. to DIN EN 61346-2</b>	Q

#### Ambient conditions

<b>Installation altitude at height above sea level</b> <ul style="list-style-type: none"> <li>• maximum</li> </ul>	2 000 m
<b>Ambient temperature</b> <ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	-20 ... +60 °C -55 ... +80 °C -55 ... +80 °C
Relative humidity during operation	10 ... 90 %

#### Main circuit

<b>Number of poles for main current circuit</b>	3
<b>Adjustable pick-up value current of the current-dependent overload release</b>	0.32 ... 1.25 A
<b>Formula for making capacity limit current</b>	38.4 x I <sub>e</sub>
<b>Formula for interruption capacity limit current</b>	32 x I <sub>e</sub>
<b>Mechanical power output for 4-pole AC motor</b> <ul style="list-style-type: none"> <li>• at 400 V rated value</li> <li>• at 500 V rated value</li> <li>• at 690 V rated value</li> </ul>	0.37 kW 0.55 kW 0.75 kW
<b>Operating voltage</b> <ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>	690 V
<b>Operating current</b> <ul style="list-style-type: none"> <li>• at AC at 400 V rated value</li> <li>• at AC-43 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> </ul> </li> </ul>	1.25 A 1.1 A 1.2 A

— at 690 V rated value	1.1 A
<b>Operating power</b>	
• at AC-3	
— at 400 V rated value	370 W
• at AC-43	
— at 400 V rated value	370 W
— at 500 V rated value	550 W
— at 690 V rated value	750 W
<b>No-load switching frequency</b>	3 600 1/h
<b>Operating frequency</b>	
• at AC-41 acc. to IEC 60947-6-2 maximum	750 1/h
• at AC-43 acc. to IEC 60947-6-2 maximum	250 1/h

#### Control circuit/ Control

<b>Type of voltage</b>	AC/DC
<b>Control supply voltage 1 at AC</b>	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
<b>Control supply voltage frequency</b>	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
<b>Control supply voltage 1</b>	
• at DC rated value	24 V
<b>Holding power</b>	
• at AC maximum	2.8 W
• at DC maximum	2.9 W

#### Auxiliary circuit

<b>Number of NC contacts for auxiliary contacts</b>	1
<b>Number of NO contacts for auxiliary contacts</b>	1
<b>Number of NO contacts</b>	
• of instantaneous short-circuit trip unit for signaling contact	1
<b>Number of CO contacts</b>	
• of the current-dependent overload release for signaling contact	1
<b>Operating current of auxiliary contacts at AC-12 maximum</b>	10 A
<b>Operating current of auxiliary contacts at DC-13</b>	
• at 250 V	0.27 A

#### Protective and monitoring functions

<b>Trip class</b>	CLASS 10 and 20 adjustable
<b>Operational short-circuit current breaking capacity (Ics)</b>	

• at 400 V	53 kA
• at 500 V rated value	3 kA
• at 690 V rated value	3 kA

#### UL/CSA ratings

<b>Full-load current (FLA) for three-phase AC motor</b>	
• at 480 V rated value	1.25 A
• at 600 V rated value	1.25 A
<b>Yielded mechanical performance [hp]</b>	
• for three-phase AC motor	
— at 460/480 V rated value	0.5 hp
— at 575/600 V rated value	0.5 hp
<b>Contact rating of auxiliary contacts according to UL</b>	contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300

#### Short-circuit protection

<b>Product function Short circuit protection</b>	Yes
<b>Design of short-circuit protection</b>	electromagnetic
<b>Design of the fuse link</b>	
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A
• for short-circuit protection of the signaling switch of the short-circuit release required	6A gL/gG/400V
• for short-circuit protection of the signaling switch of the overload release required	4A gL/gG/400V

#### Installation/ mounting/ dimensions

<b>Mounting position</b>	any
• recommended	vertical, on horizontal standard mounting rail
<b>Mounting type</b>	screw and snap-on mounting
<b>Height</b>	191 mm
<b>Width</b>	45 mm
<b>Depth</b>	165 mm

#### Connections/ Terminals

<b>Product function</b>	
• removable terminal for main circuit	Yes
• removable terminal for auxiliary and control circuit	Yes
<b>Type of electrical connection</b>	
• for main current circuit	spring-loaded terminals
• for auxiliary and control current circuit	spring-loaded terminals
<b>Type of connectable conductor cross-sections</b>	
• for main contacts	
— solid	2x (1.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>

— finely stranded with core end processing	2x (1.5 ... 6 mm <sup>2</sup> )
— finely stranded without core end processing	2x (1.5 ... 6 mm <sup>2</sup> )
• at AWG conductors for main contacts	2x (16 ... 10), 1x 8
<b>Type of connectable conductor cross-sections</b>	
• for auxiliary contacts	
— solid	2x (0.25 ... 1.5 mm <sup>2</sup> )
— finely stranded with core end processing	2x (0.25 ... 1.5 mm <sup>2</sup> )
— finely stranded without core end processing	2x (0.25 ... 1.5 mm <sup>2</sup> )
• at AWG conductors for auxiliary contacts	2x (24 ... 16)

#### Safety related data

<b>B10 value</b>	
• with high demand rate acc. to SN 31920	3 000 000
<b>Proportion of dangerous failures</b>	
• with low demand rate acc. to SN 31920	40 %
• with high demand rate acc. to SN 31920	50 %
<b>Failure rate [FIT]</b>	
• with low demand rate acc. to SN 31920	100 FIT
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y

#### Communication/ Protocol

<b>Product function Bus communication</b>	No
<b>Protocol is supported</b>	
• IO-Link protocol	No
Product function Control circuit interface with IO link	No

#### Electromagnetic compatibility

<b>Conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	4 kV main contacts, 2 kV auxiliary contacts
• due to conductor-earth surge acc. to IEC 61000-4-5	4 kV main contacts, 2 kV auxiliary contacts
• due to conductor-conductor surge acc. to IEC 61000-4-5	2 kV main contacts, 1 kV auxiliary contacts
• due to high-frequency radiation acc. to IEC 61000-4-6	0.15-80Mhz at 10V
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	8 kV
<b>Conducted HF-interference emissions acc. to CISPR11</b>	150 kHz ... 30 MHz Class A
<b>Field-bound HF-interference emission acc. to CISPR11</b>	30 ... 1000 MHz Class A

#### Supply voltage

Supply voltage required Auxiliary voltage

No

## Certificates/ approvals

### General Product Approval

### EMC

### Functional Safety/Safety of Machinery



CCC



CSA



UL



RCM



VDE

### Declaration of Conformity

### Test Certificates

### Marine / Shipping



EG-Konf.

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



ABS



BUREAU VERITAS



LRS

### Marine / Shipping

### other



PRS



RINA



RMRS



DNVGL.COM/AF

[Confirmation](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

[www.siemens.com/sirius/catalogs](http://www.siemens.com/sirius/catalogs)

### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6120-2BB32>

### Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6120-2BB32>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6120-2BB32>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA6120-2BB32&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6120-2BB32&lang=en)

### Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6120-2BB32/char>


### Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA6120-2BB32&objecttype=14&gridview=view1>

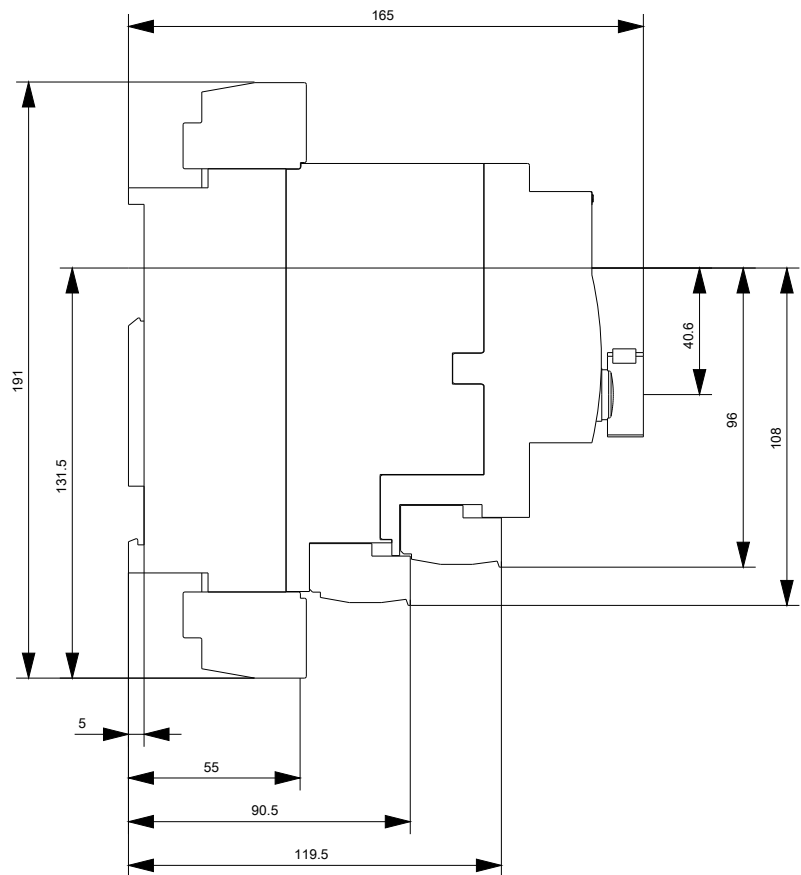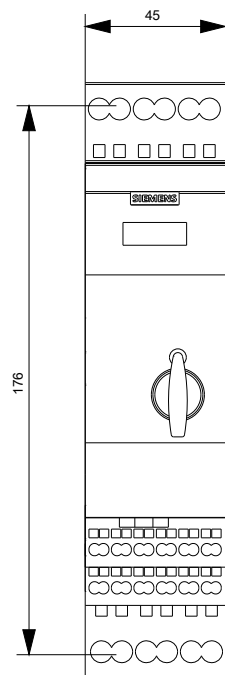





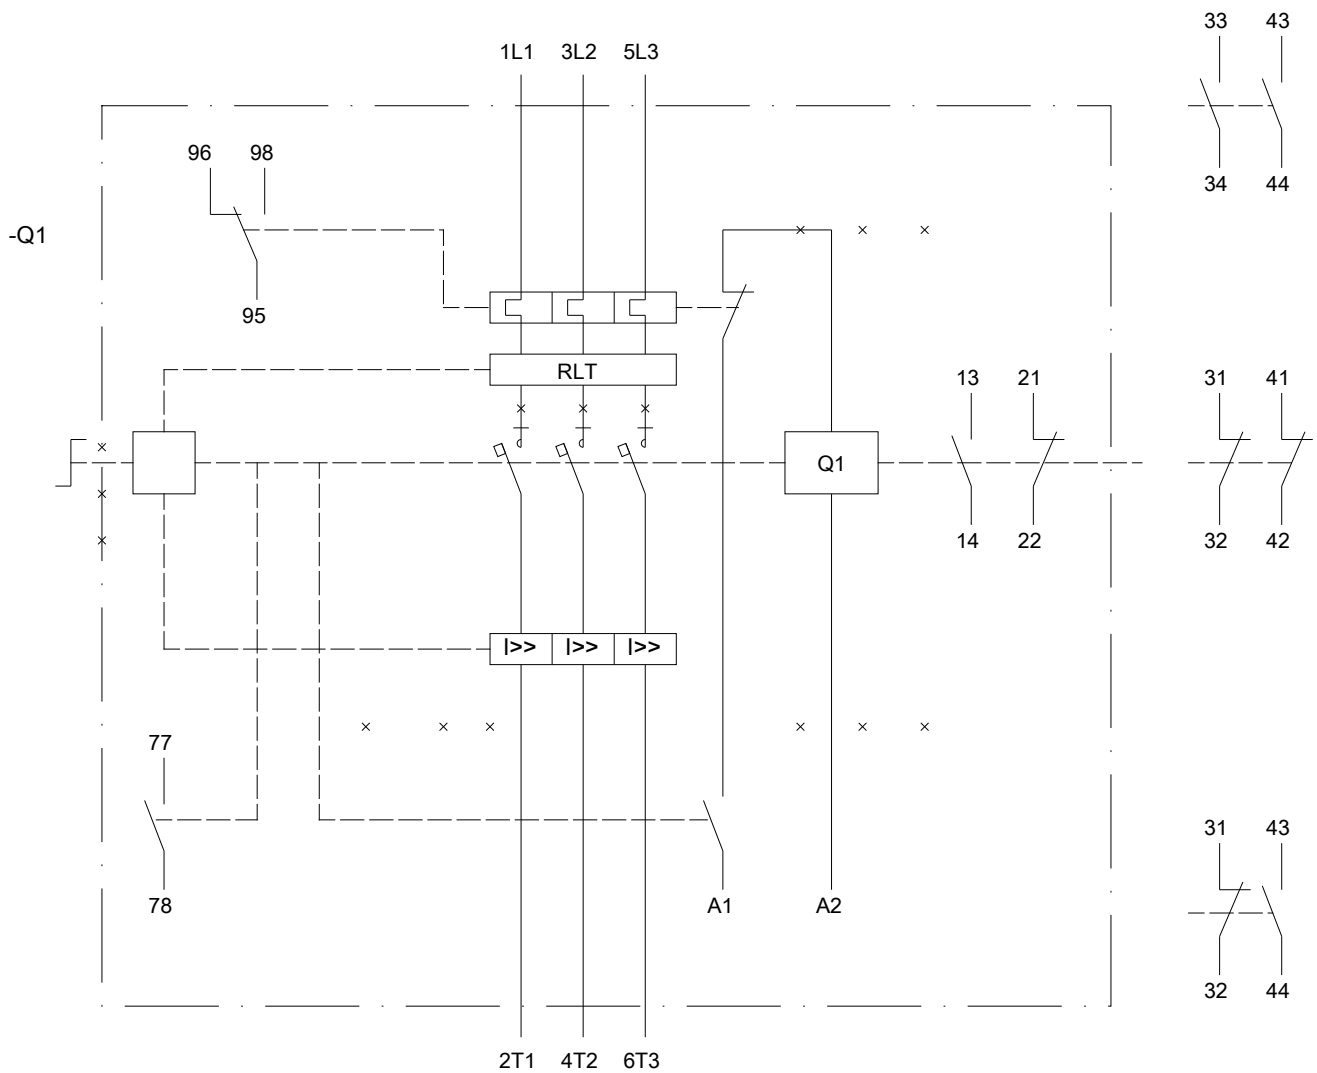

last modified:

10/17/2019