

Direct starter, 3RM1, 500 V, 0.55 - 3 kW, 1.6 - 7 A, 110-230 V AC, screw terminals



| | |
|--------------------------|-------------------------------------|
| Product brand name | SIRIUS |
| Product category | Motor starter |
| Product designation | Direct-on-line starter |
| Design of the product | with electronic overload protection |
| Product type designation | 3RM1 |

| General technical data | |
|---|-----------|
| Trip class | CLASS 10A |
| Product function | |
| • Intrinsic device protection | Yes |
| Suitability for operation Device connector 3ZY12 | No |
| Power loss [W] for rated value of the current at AC in hot operating state per pole | 1.13 W |
| Insulation voltage | |
| • rated value | 500 V |
| Surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| • between main and auxiliary circuit | 500 V |
| • between control and auxiliary circuit | 250 V |
| Protection class IP | IP20 |

| | |
|--|---|
| Shock resistance | 6g / 11 ms |
| Vibration resistance | 1 ... 6 Hz, 15 mm; 20 m/s ² , 500 Hz |
| Operating frequency maximum | 1 1/s |
| Mechanical service life (switching cycles) | |
| • typical | 30 000 000 |
| Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750 | Q |
| Reference code acc. to DIN EN 81346-2 | Q |
| Reference code acc. to DIN EN 61346-2 | Q |
| Product function | |
| • direct start | Yes |
| • reverse starting | No |
| Product function Short circuit protection | No |

Electromagnetic compatibility

| | |
|--|--|
| Conducted interference | |
| • due to burst acc. to IEC 61000-4-4 | 3 kV / 5 kHz |
| • due to conductor-earth surge acc. to IEC 61000-4-5 | 2 kV |
| • due to conductor-conductor surge acc. to IEC 61000-4-5 | 1 kV |
| • due to high-frequency radiation acc. to IEC 61000-4-6 | 10 V |
| Electrostatic discharge acc. to IEC 61000-4-2 | 4 kV contact discharge / 8 kV air discharge |
| Conducted HF-interference emissions acc. to CISPR11 | Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC |
| Field-bound HF-interference emission acc. to CISPR11 | Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC |

Safety related data

| | |
|-------------------------------------|-------------|
| Protection against electrical shock | finger-safe |
|-------------------------------------|-------------|

Main circuit

| | |
|--|---------------------------------|
| Number of poles for main current circuit | 3 |
| Design of the switching contact as NO contact for signaling function | OUT, electronic, 24 V DC, 15 mA |
| Adjustable pick-up value current of the current-dependent overload release | 1.6 ... 7 A |
| Minimum load [%] | 20 % |
| Type of the motor protection | solid-state |
| Operating voltage | |
| • rated value | 48 ... 500 V |
| Relative symmetrical tolerance of the operating voltage | 10 % |
| Operating frequency 1 rated value | 50 Hz |
| Operating frequency 2 rated value | 60 Hz |

| | |
|--|---------------|
| Relative symmetrical tolerance of the operating frequency | 10 % |
| Operating current | |
| • at AC at 400 V rated value | 7 A |
| • at AC-53a at 400 V at ambient temperature 40 °C rated value | 7 A |
| Ampacity when starting maximum | 56 A |
| Operating power for three-phase motors at 400 V at 50 Hz | 0.55 ... 3 kW |
| Derating temperature | 40 °C |

Inputs/ Outputs

| | |
|--|--------------|
| Input voltage at digital input | |
| • at DC rated value | 110 V |
| • with signal <0> at DC | 0 ... 40 V |
| • for signal <1> at DC | 79 ... 121 |
| Input voltage at digital input | |
| • at AC rated value | 110 V |
| • with signal <0> at AC | 0 ... 40 V |
| • for signal <1> at AC | 93 ... 253 V |
| Input current at digital input | |
| • with signal <0> typical | 0.0004 A |
| • for signal <1> typical | 0.002 A |
| Input current at digital input | |
| • for signal <1> at DC | 1.5 mA |
| • with signal <0> at DC | 0.25 mA |
| Input current at digital input with signal <0> at AC | |
| • at 110 V | 0.2 mA |
| • at 230 V | 0.4 mA |
| Input current at digital input for signal <1> at AC | |
| • at 110 V | 1.1 mA |
| • at 230 V | 2.3 mA |
| Number of CO contacts for auxiliary contacts | 1 |
| Operating current of auxiliary contacts at AC-15 at 230 V maximum | 3 A |
| Operating current of auxiliary contacts at DC-13 at 24 V maximum | 1 A |

Control circuit/ Control

| | |
|--|---------------|
| Type of voltage of the control supply voltage | AC/DC |
| Control supply voltage 1 at AC | |
| • at 50 Hz | 110 ... 230 V |
| • at 60 Hz | 110 ... 230 V |
| Control supply voltage frequency | |

| | |
|---|---|
| <ul style="list-style-type: none"> • 1 rated value • 2 rated value | 50 Hz 60 Hz |
| Control supply voltage 1 <ul style="list-style-type: none"> • at DC rated value | 110 V |
| Operating range factor control supply voltage rated value at DC <ul style="list-style-type: none"> • initial value • Full-scale value | 0.85 1.1 |
| Operating range factor control supply voltage rated value at AC at 50 Hz <ul style="list-style-type: none"> • initial value • Full-scale value | 0.85 1.1 |
| Operating range factor control supply voltage rated value at AC at 60 Hz <ul style="list-style-type: none"> • initial value • Full-scale value | 1.1 0.85 |
| Control current at AC <ul style="list-style-type: none"> • at 110 V in standby mode • at 230 V in standby mode • at 110 V when switching on • at 230 V when switching on • at 110 V during operation • at 230 V during operation | 16 mA 9 mA 55 mA 33 mA 36 mA 22 mA |
| Control current at DC <ul style="list-style-type: none"> • in standby mode • when switching on • during operation | 6 mA 15 mA 30 mA |

Response times

| | |
|-----------------------------|--------------|
| Switch-on delay time | 60 ... 90 ms |
| Off-delay time | 60 ... 90 ms |

Installation/ mounting/ dimensions

| | |
|---|--|
| Mounting position | vertical, horizontal, standing (observe derating) |
| Mounting type | screw and snap-on mounting onto 35 mm standard mounting rail |
| Height | 100 mm |
| Width | 22.5 mm |
| Depth | 141.6 mm |
| Required spacing <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards | 0 mm 0 mm 50 mm 50 mm |

| | |
|----------------------|--------|
| — at the side | 0 mm |
| • for grounded parts | |
| — forwards | 0 mm |
| — Backwards | 0 mm |
| — upwards | 50 mm |
| — at the side | 3.5 mm |
| — downwards | 50 mm |

Ambient conditions

| | |
|--|-------------------|
| Installation altitude at height above sea level | |
| • maximum | 4 000 m |
| Ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -40 ... +70 °C |
| • during transport | -40 ... +70 °C |
| Relative humidity during operation | 10 ... 95 % |
| Air pressure | |
| • acc. to SN 31205 | 900 ... 1 060 hPa |

Communication/ Protocol

| | |
|---|----|
| Product function Bus communication | No |
|---|----|

Connections/ Terminals

| | |
|---|---|
| Type of electrical connection | screw-type terminals for main circuit, screw-type terminals for control circuit |
| • for main current circuit | screw-type terminals |
| • for auxiliary and control current circuit | screw-type terminals |
| Type of connectable conductor cross-sections | |
| • for main contacts | |
| — solid | 1x (0,5 ... 4 mm ²), 2x (0,5 ... 2,5 mm ²) |
| — finely stranded with core end processing | 1x (0,5 ... 4 mm ²), 2x (0,5 ... 1,5 mm ²) |
| • at AWG conductors for main contacts | 1x (20 ... 12), 2x (20 ... 14) |
| Connectable conductor cross-section for main contacts | |
| • single or multi-stranded | 0.5 ... 4 mm ² |
| • finely stranded with core end processing | 0.5 ... 4 mm ² |
| Connectable conductor cross-section for auxiliary contacts | |
| • single or multi-stranded | 0.5 ... 2.5 mm ² |
| • finely stranded with core end processing | 0.5 ... 2.5 mm ² |
| Type of connectable conductor cross-sections | |
| • for auxiliary contacts | |
| — solid | 1x (0,5 ... 2,5 mm ²), 2x (1,0 ... 1,5 mm ²) |
| — finely stranded with core end processing | 1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1 mm ²) |

| | |
|--|--------------------------------|
| • at AWG conductors for auxiliary contacts | 1x (20 ... 14), 2x (18 ... 16) |
| AWG number as coded connectable conductor cross section | |
| • for main contacts | 20 ... 12 |
| • for auxiliary contacts | 20 ... 14 |

UL/CSA ratings

| | |
|--|---------|
| Yielded mechanical performance [hp] | |
| • for single-phase AC motor | |
| — at 110/120 V rated value | 0.25 hp |
| — at 230 V rated value | 0.5 hp |
| • for three-phase AC motor | |
| — at 200/208 V rated value | 1 hp |
| — at 220/230 V rated value | 1.5 hp |
| — at 460/480 V rated value | 3 hp |

Certificates/ approvals

| General Product Approval | EMC | Declaration of Conformity |
|---|---|--|
|  CCC |  EAC |  EG-Konf. |
|  CSA |  UL |  RCM |

| Declaration of Conformity | Test Certificates | other | Railway |
|-------------------------------|--|------------------------------|--|
| Miscellaneous | Type Test Certificates/Test Report | Confirmation | Special Test Certificate |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1007-1AA14>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1007-1AA14>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<https://support.industry.siemens.com/cs/ww/en/ps/3RM1007-1AA14>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1007-1AA14&lang=en

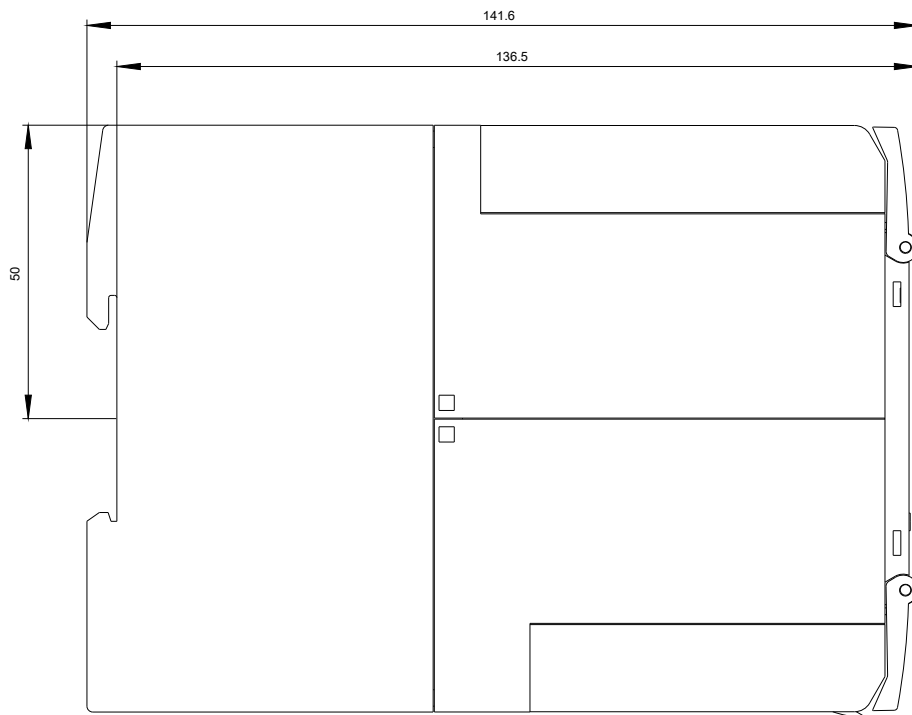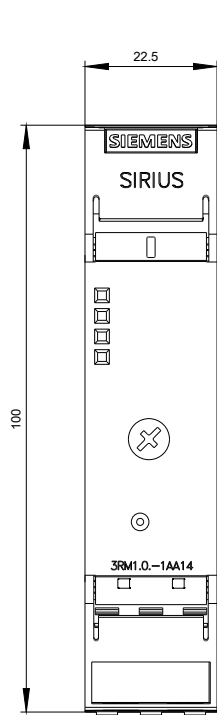

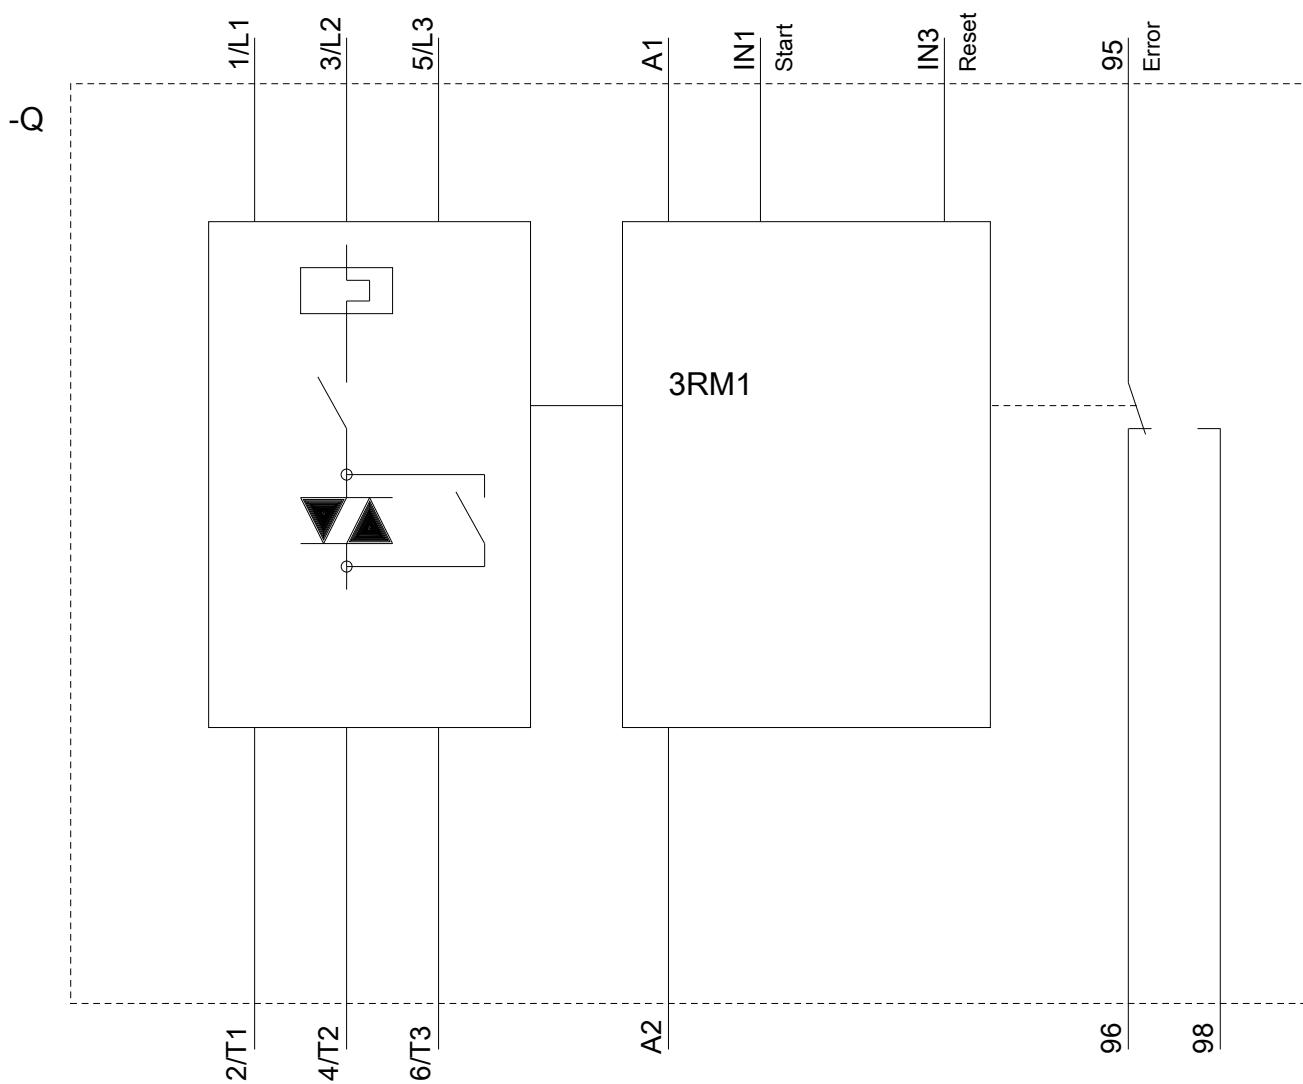

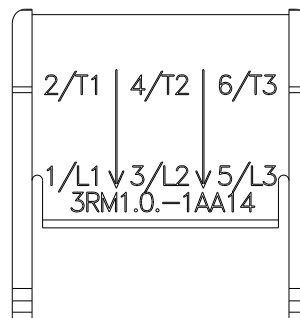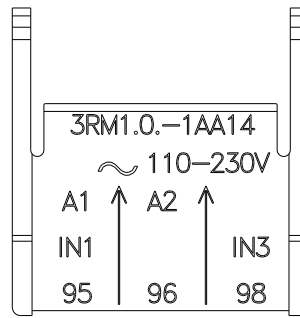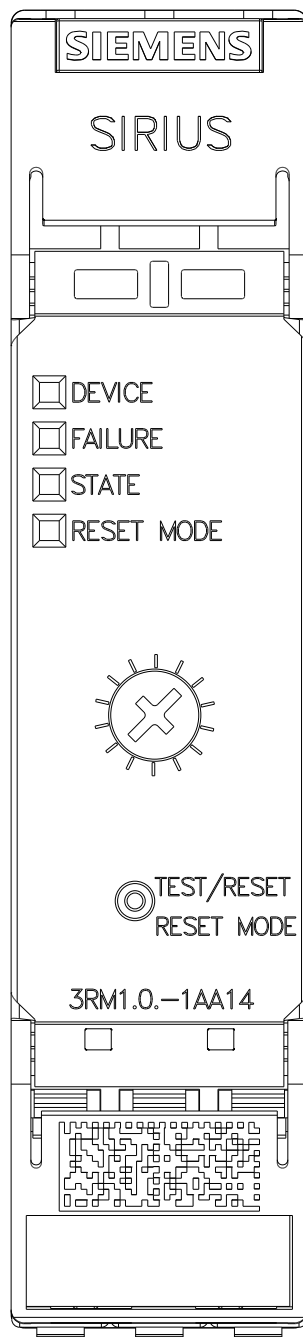

last modified:

11/05/2019