

Contact block for position switch 3SE51/52 1 NO/2 NC quick action contact



Product brand name	SIRIUS
Product designation	contact
Product type designation	3SE5

General technical data

Product function	
• positive opening	Yes
Degree of pollution	class 3
Surge voltage resistance rated value	6 kV
Protection class IP	IP00
Shock resistance	
• acc. to IEC 60068-2-27	30 g / 11 ms
Mechanical service life (switching cycles)	
• typical	15 000 000
Electrical endurance (switching cycles)	
• at AC-15 at 230 V typical	100 000
Electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical	10 000 000

Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026	6 000
Thermal current	10 A
Reference code acc. to DIN EN 81346-2	S
Reference code acc. to DIN EN 61346-2	S
Continuous current of the C characteristic MCB	1 A; for a short-circuit current smaller than 400 A
Continuous current of the quick DIAZED fuse link	10 A; for a short-circuit current smaller than 400 A
Continuous current of the DIAZED fuse link gG	6 A
Active principle	mechanical
Repeat accuracy	0.1 mm
Width of the sensor	25 mm
Operating frequency rated value	50 ... 60 Hz
Number of NC contacts for auxiliary contacts	2
Number of NO contacts for auxiliary contacts	1
Operating current at AC-15 • at 24 V rated value • at 125 V rated value • at 240 V rated value • at 400 V rated value	6 A 6 A 6 A 4 A
Operating current at DC-13 • at 24 V rated value • at 125 V rated value • at 250 V rated value • at 400 V rated value	3 A 0.55 A 0.27 A 0.12 A

Enclosure

Coating of the enclosure	Other types
--------------------------	-------------

Drive Head

Design of the switching function	positive opening
Circuit principle	snap-action contacts
Number of switching contacts safety-related	2

Connections/ Terminals

Type of connectable conductor cross-sections • solid • finely stranded with core end processing • at AWG conductors solid • at AWG conductors stranded	1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 0.75 mm ²) 1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 0.75 mm ²) 1x (20 ... 16), 2x (20 ... 18) 1x (20 ... 16), 2x (20 ... 18)
---	--

Communication/ Protocol

Design of the interface	without
-------------------------	---------

Ambient conditions

Ambient temperature	
---------------------	--

- during operation
- during storage

-25 ... +85 °C

-40 ... +90 °C

Explosion protection category for dust

none

Installation/ mounting/ dimensions

Mounting position

any

Mounting type

snap-on mounting

Certificates/ approvals

General Product Approval

Declaration of
Conformity



CCC



CSA



UR

[KC](#)



EG-Konf.

Declaration of
Conformity

[Miscellaneous](#)

Test Certific-
ates

[Type Test Certific-
ates/Test Report](#)

other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SE5000-0LA00>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE5000-0LA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3SE5000-0LA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE5000-0LA00&lang=en

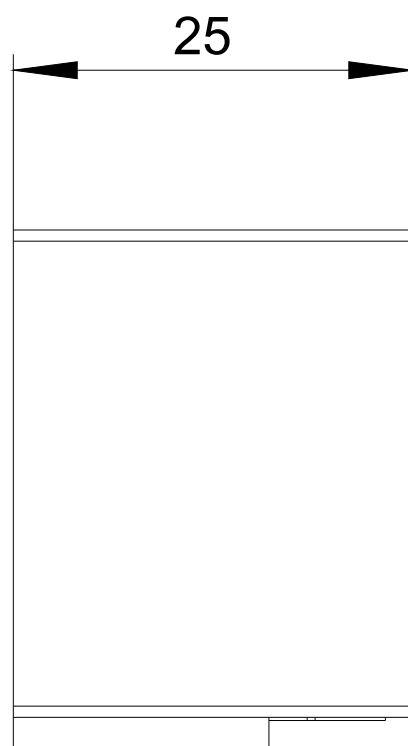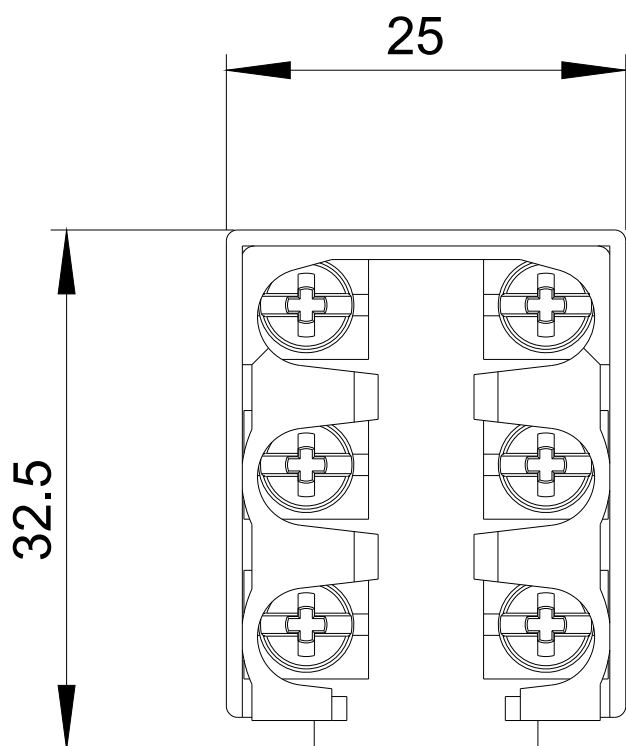

last modified:

10/25/2019